

Floor Console


Heating Possible
-15°C

Cooling Possible
43°C

Slim and Elegant Appearance

A neat fit even in limited space

Thanks to the floor console's slim, compact design, you can install it even where space is limited. What's more, although small, the unit is surprisingly powerful and energy-saving.

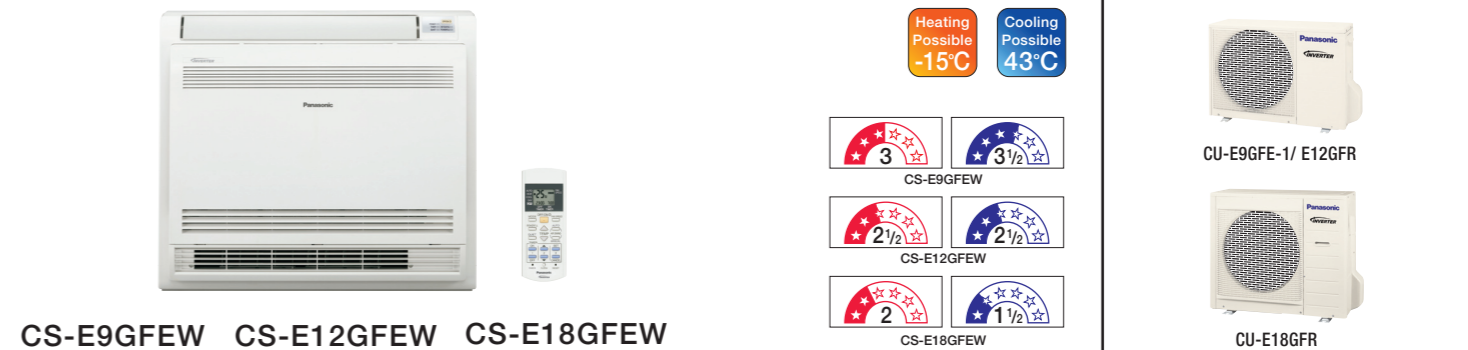

Specifications

Model No. (240V)	Cooling Capacity		Air Flow L/s	Dehumid L/h	Running Current A	Power Input kW	EER COP	Star Rating	Sound Pressure Level*1 dB (A)			Net Weight kg	Dimensions Height x Width x Depth mm	Refrigerant Pipe Diameter		Pipe Length for Additional Gas m	Additional Gas Amount g/m	Power Supply	Operating Range (outdoor) Cooling Heating Degree (°C)		
	kW	Btu/h							Inside (Hi/L0/S-Lo)	Outside (Hi/S-Lo)	Outside (Hi/S-Lo)			Liquid Side (mm)	Gas Side (mm)				Cooling	Heating	
CS-E9GFEW (CU-E9GFE-1)	2.50 (0.80-3.00)	8,500 (2,700-10,200)	155	1.4	2.65	0.57 (0.175-0.78)	4.39	3.5	38/27/23	46/—	59/—	14 (34)	600 x 700 x 210 (540 x 780 x 289)	6.35	9.52	3-15	7.5	20	Outdoor	16-43	-15-24
	3.60 (0.80-5.00)	12,300 (2,700-17,100)	160		3.90	0.865 (0.165-1.36)	4.16	3.0	38/27/23	47/—	60/—										
CS-E12GFEW (CU-E12GFR)	3.40 (0.80-3.80)	11,600 (2,730-13,000)	158	2.0	3.8	0.86 (0.185-1.14)	3.95	2.5	39/28/24	48/—	63/—	14 (35)	600 x 700 x 210 (540 x 780 x 289)	6.35	9.52	3-15	7.5	20	Outdoor	16-43	-15-24
	4.40 (0.80-5.40)	15,000 (2,730-18,400)	167		4.9	1.09 (0.175-1.42)	4.04	2.5	39/27/23	50/—	65/—										
CS-E18GFEW (CU-E18GFR)	5.00 (0.90-5.60)	17,100 (3,070-19,100)	183	2.8	6.5	1.55 (0.255-1.91)	3.23	1.5	44/36/32	47/—	61/—	14 (49)	600 x 700 x 210 (750 x 875 x 345)	6.35	12.70	3-20	10	20	Outdoor	16-43	-15-24
	5.60 (0.90-6.50)	19,100 (3,070-22,200)	217		6.6	1.50 (0.26-1.73)	3.73	2.0	46/36/32	48/—	62/—										


*1 Sound Pressure Level is measured according to JIS C 9612.

Comfortable up-down bidirectional airflow warms the entire room down to your toes




Upper & Lower Vane Blow

Optimum air flow from the top and bottom of the unit assures that even your feet are kept comfortably warm. (Only during heating)

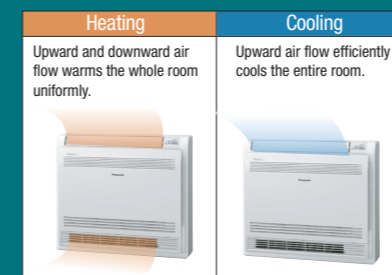

Compact Design


The design features a flat, elegant front panel that provides a neat appearance. And the unit can be recessed into a wall up to 95 mm.



Compatible with Multi System

You can use the unit with up to 3 other indoor units, minimizing the space required for outdoor units.

* Compatible outdoor units
CU-4E27CBPG

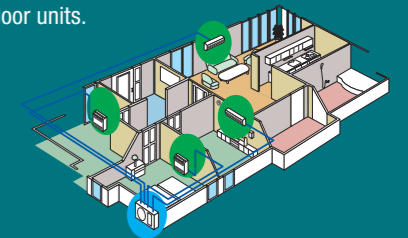

Super Quiet

The indoor and outdoor units deliver quiet operation. And pressing the Quiet mode button lowers operation noise even further to just 23dB for indoor unit with low fan speed.



*1 CS-E9GFEW : In the Quiet mode during cooling/heating operation with low fan speed
CS-E12GFEW: In the Quiet mode during heating operation with low fan speed

