

## Wall-Mounted (Deluxe)

## Floor Console

Reverse cycle

**NEW**



|          |             |             |             |               |
|----------|-------------|-------------|-------------|---------------|
| Model No | CS-E7LKEW   | CS-E9LKEW   | CS-E12LKEW  | CS-E15LKEW *1 |
| Capacity | 2.0kW class | 2.5kW class | 3.2kW class | 4.0kW class   |

|          |               |                  |
|----------|---------------|------------------|
| Model No | CS-E18LKEW *1 | CS-E21LKEW *2 *3 |
| Capacity | 5.0kW class   | 6.0kW class      |




|          |             |             |               |
|----------|-------------|-------------|---------------|
| Model No | CS-E9GFEW   | CS-E12GFEW  | CS-E18GFEW *1 |
| Capacity | 2.8kW class | 3.2kW class | 5.0kW class   |

## Cassette (1-way)

## Cassette (4-way)

Indoor Unit

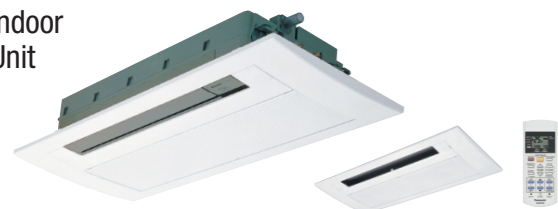

Panel CZ-BT20P

|          |             |             |             |             |
|----------|-------------|-------------|-------------|-------------|
| Model No | CS-ME7KB1E  | CS-ME10EB1E | CS-ME12EB1E | CS-ME14EB1E |
| Capacity | 2.0kW class | 2.8kW class | 3.2kW class | 4.0kW class |



Panel CZ-BT20E

|          |             |                |                |                   |
|----------|-------------|----------------|----------------|-------------------|
| Model No | CS-E10KB4EA | CS-E15HB4EA *1 | CS-E18HB4EA *1 | CS-E21JB4EA *2 *3 |
| Capacity | 2.5kW class | 4.0kW class    | 5.0kW class    | 6.0kW class       |

## Floor or Ceiling

## Hide-Away



|          |             |               |               |
|----------|-------------|---------------|---------------|
| Model No | CS-ME10DTEG | CS-E15DTEW *1 | CS-E18DTEW *1 |
| Capacity | 2.8kW class | 4.0kW class   | 5.0kW class   |



|          |             |                |                |
|----------|-------------|----------------|----------------|
| Model No | CS-E10KD3EA | CS-E15JD3EA *1 | CS-E18JD3EA *1 |
| Capacity | 2.5kW class | 4.0kW class    | 5.0kW class    |

## 2 rooms

## 4 rooms

Outdoor Unit

Heating Possible -15°C<sup>4</sup>  
Cooling Possible 43°C



CU-2E18LBE

Heating Possible -20°C<sup>5</sup>  
Cooling Possible 46°C



CU-4E23LBE

Heating Possible -15°C<sup>4</sup>  
Cooling Possible 43°C



CU-4E27CBPG

### Additional Parts

Pipe Size Reducer



CZ-MA1P

For the indoor units marked with a star (\*1), the pipe size reducer must be used at the indoor unit's connection port.

Pipe Size Expander



CZ-MA2P

For the indoor units marked with a star (\*2), the pipe size expander must be used at the outdoor unit's connection port.

\*3 Only be used with the CU-4E23LBE.

## Advantages of the Multi Inverter System

**Indoor unit**

- A variety of indoor units
- Air-quality features (Wall-mounted type only)
  - Advanced\* Plus e-ion Air Purifying System
  - Patrol Sensor
- Adjusts the operation settings for each indoor unit independently

**Outdoor unit**

- Space-saving  
68% less space than four single split types.

With a single outdoor unit, control up to 4 indoor units. (Maximum)

**Inverter control**  
The inverter offers energy-saving efficiency, quick comfort, and flexible power control. Our compressor saves more energy while reducing vibration, noise and unit size.

## Combination Patterns

| Models  | Indoor Units: Possible Combination Patterns<br>Must be within capacity range.  | Indoor Units Combination Range | Refrigerant Pipe Diameter |             |          | Pipe Extension               |                             |                           |                | Indoor Unit Combinations |                          |              |               |                  |                  |                  |
|---|--|--------------------------------|---------------------------|-------------|----------|------------------------------|-----------------------------|---------------------------|----------------|--------------------------|--------------------------|--------------|---------------|------------------|------------------|------------------|
|   |  |                                | Indoor Unit               | Liquid Side | Gas Side | Maximum Pipe Length (1 room) | Maximum Pipe Length (Total) | Maximum Chargeless Length | Additional Gas | Maximum Height           | Type Capacity (kW class) | Wall-Mounted | Floor Console | Cassette (1-way) | Cassette (4-way) | Floor or Ceiling |
| CU-2E18LBE<br>5.2kW<br>Dimensions (HxWxD): 540 x 780(+70) x 289 mm<br>Weight: 38 kg | PORT A: 2.0, 2.5, 2.8, 3.2<br>* Either unit<br>PORT B: 2.0, 2.5, 2.8, 3.2<br>* Either unit   | 4.0   6.4 kW                   | Room A                    | ø 6.35      | ø 9.52   | 20 m                         | 30 m                        | 20 m                      | 20 g/m         | 10 m                     | 2.0                      | •            | •             |                  |                  |                  |
|   |  |                                | Room B                    | ø 6.35      | ø 9.52   |                              |                             |                           |                |                          | 2.5                      | •            |               | •                |                  |                  |
| CU-4E23LBE<br>6.8kW<br>Dimensions (HxWxD): 795 x 875(+95) x 320 mm<br>Weight: 72 kg | PORT A: 2.0, 2.5, 2.8, 3.2, 4.0, 5.0, 6.0<br>* Either unit<br>PORT B: 2.0, 2.5, 2.8, 3.2, 4.0, 5.0, 6.0<br>* Either unit<br>PORT C: 2.0, 2.5, 2.8, 3.2, 4.0, 5.0, 6.0<br>* Either unit<br>PORT D: 2.0, 2.5, 2.8, 3.2, 4.0, 5.0, 6.0<br>* Either unit | 4.5   11.0 kW                  | Room A                    | ø 6.35      | ø 9.52   | 25 m                         | 60 m                        | 30 m                      | 20 g/m         | 15 m                     | 2.0                      | •            | •             |                  |                  |                  |
|   |  |                                | Room B                    | ø 6.35      | ø 9.52   |                              |                             |                           |                |                          | 2.5                      | •            |               | •                |                  |                  |
|   |  |                                | Room C                    | ø 6.35      | ø 9.52   |                              |                             |                           |                |                          | 2.8                      | •            |               | •                | •                |                  |
|   |  |                                | Room D                    | ø 6.35      | ø 9.52   |                              |                             |                           |                |                          | 3.2                      | •            |               | •                | •                | •                |
| CU-4E27CBPG<br>8.0kW<br>Dimensions (HxWxD): 908 x 900 x 320 mm<br>Weight: 73 kg     | PORT A: 2.0, 2.5, 2.8, 3.2, 4.0, 5.0<br>* Either unit<br>PORT B: 2.0, 2.5, 2.8, 3.2, 4.0, 5.0<br>* Either unit<br>PORT C: 2.0, 2.5, 2.8, 3.2, 4.0, 5.0<br>* Either unit<br>PORT D: 2.0, 2.5, 2.8, 3.2, 4.0, 5.0<br>* Either unit                     | 4.5   13.6 kW                  | Room A                    | ø 6.35      | ø 9.52   | 25 m                         | 70 m                        | 40 m                      | 20 g/m         | 15 m                     | 2.0                      | •            | •             |                  |                  |                  |
|   |  |                                | Room B                    | ø 6.35      | ø 9.52   |                              |                             |                           |                |                          | 2.5                      | •            |               | •                |                  |                  |
|   |  |                                | Room C                    | ø 6.35      | ø 9.52   |                              |                             |                           |                |                          | 2.8                      | •            |               | •                | •                |                  |
|   |  |                                | Room D                    | ø 6.35      | ø 9.52   |                              |                             |                           |                |                          | 3.2                      | •            |               | •                | •                | •                |

\*4 Operating temperature limit is -15°C with performance data guaranteed down to -10°C.  
\*5 Operating temperature limit is -20°C with performance data guaranteed down to -15°C.